





Idex 25

IDEX LED is a new generation exit light with cutting edge technology and a modern and elegant design.

Wide range of mounting options, including wall, ceiling and recessed allows for a consistent look and feel across different areas of building.

In the package includes all the pictograms and changing the pictograms is easy.

Viewing distance.....	< 25m
Light source	LED
IP Class.....	IP44
Supply voltage model A.....	24V AC/DC
Supply voltage model B.....	100-240 V AC/DC
Supply voltage model AT	230 V AC
Protection class model A.....	III
Protection class B and AT model.....	I
Input power A model	< 2.5W
Input Power B model	< 3 W / 6.5 VA
Input power AT model.....	< 3.5 W
Temperature range.....	-30 +45°C
-For models with battery.....	0 +40°C
Battery / Back up time.....	Li-ion 3.7 V / 1h
Body material.....	Anodized aluminium / white aluminium
-Sign.....	Acrylic, Polypropylene
-Endpiece	Polycarbonate
Mounting option	Surface, recess
Country of origin.....	Finland
Standards.....	EN60598-2-22, EN1838, EN62034, EN ISO7010

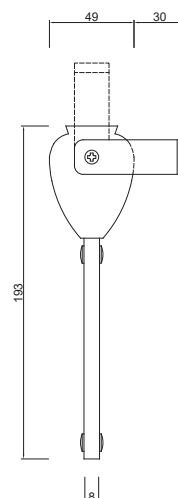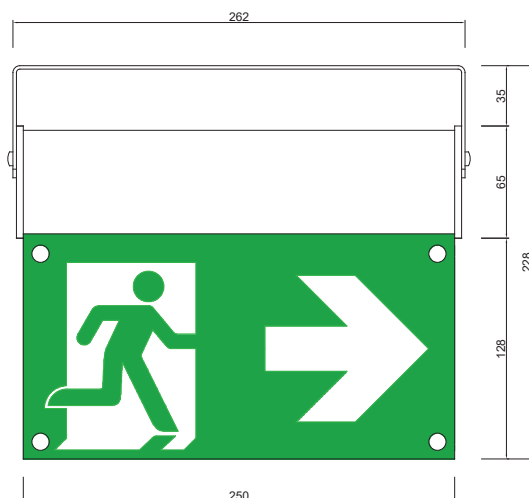

Product code	Name	Sign	Supply voltage
2100251	IDEX 25 A	Sign set	24V AC/DC
2100252	IDEX 25 B	Sign set	230V AC/DC
2100253	IDEX 25 AT	Sign set	230V AC
2100254	IDEX 25 DALI	Sign set	230V AC/DC
2100255	IDEX 25 DALI AT	Sign set	230V AC
2100256	IDEX 25 CGS	Sign set	230V AC/DC
2100257	IDEX 25 CGS Ready	Sign set	



Installation and spare parts:

2109800	Rechargeable batteries 3,2V Li
2109201	Sign Set E1+E2+E3+E3+blank
2109241	Sign Set HCP+E1+E2+E3+E3+blank
2109710	LED card 244x31mm + power A
2109712	LED card 244x31mm + power B
2109715	LED card 244x31mm + power AT
2109010	Flush mount kit (Idex 25)
2109011	Flush mount kit for soft ceilings
1005705	Flag bracket
5631522	Bracket fastner SK-25 white
1005902	Ball protection 280x280x110mm
2109909	IDEX option: Gray color
1800009	Charge for special color RA

