

IP 44

RAL

LED

<40 m




Idex 40

IDEX LED is a new generation exit light with cutting edge technology and a modern and elegant design.

Wide range of mounting options, including wall, ceiling and recessed allows for a consistent look and feel across different areas of building.

In the package includes all the pictograms and changing the pictograms is easy.


Viewing distance.....	< 40m
Light source	LED
IP Class.....	IP44
Supply voltage model A.....	24V AC/DC
Supply voltage model B.....	100-240 V AC/DC
Supply voltage model AT.....	230 V AC
Protection class model A.....	III
Protection class B and AT model.....	I
Input power A model.....	< 4 W
Input Power B model.....	< 4.5 W / 9.5 VA
Input power AT model.....	< 5 W
Temperaturerange.....	-30 +45°C
-For models with battery.....	0 +40°C
Battery / Back up time.....	Li-ion 3.7V / 1h
Body material.....	Anodized aluminium / white aluminium
-Sign.....	Acrylic, Polypropylene
-Endpiece	Polycarbonate
Mounting option.....	Surface, recess
Country of origin.....	Finland
Standards..	EN60598-2-22, EN1838, EN62034, EN ISO7010

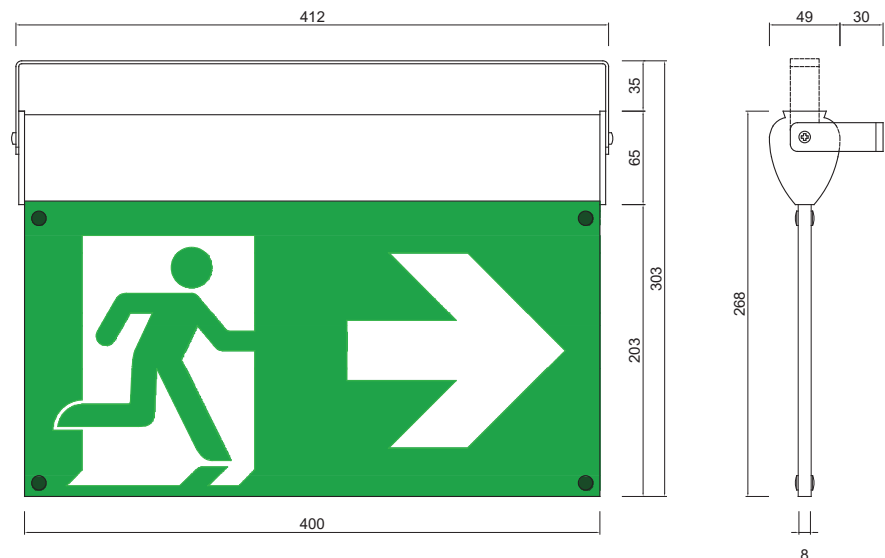

WIKROLUX

Oy Wikrolux Ab, Penviikintie 10, FI68600 Pietarsaari
Tel. +358 (0)6 723 4567, info@wikrolux.fi

Product code	Name	Sign	Supply voltage
2100401	IDEX 40 A	Sign set	24V AC/DC
2100402	IDEX 40 B	Sign Set	230V AC/DC
2100403	IDEX 40 AT	Sign Set	230V AC
2100404	IDEX 40 DALI	Sign Set	230V AC/DC
2100405	IDEX 40 DALI AT	Sign Set	230V AC
2100406	IDEX 40 CGS	Sign Set	230V AC/DC
2100407	IDEX 40 CGS Ready	Sign Set	

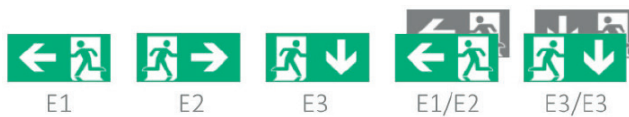

Installation and spare parts:

2109800	Rechargeable batteries 3,2V Li 4,50
2109400	Sign Set E1+E2+E3+E3+blank
2109440	Sign Set HCP+E1+E2+E3+E3+blank
2109750	LED card 390x31mm + power A
2109752	LED card 390x31mm + power B
2109755	LED card 390x31mm + power AT
2109012	Flush mount plate
2109013	Flush mount kit for soft ceilings
5631523	Bracket fastner SK-40 white
1005904	Ball protection 320x480x110mm
2109909	IDEX option: Grey color, LV-anodized
1800009	Charge for special color RAL

